

Selection/Satisfaction/Service = The AMT Advantage

NanoSprint500: Low Noise CMOS Camera


***5.0 megapixel scientific sCMOS sensor
40 Frames per second readout
2.3 electrons per pixel readout noise
Non-blooming sensor
USB 3.0 interface
AMT's proven high performance A- Lens***




The NanoSprint500 is a 5 Megapixel camera system that is available in the wide-angle side mount, low mount, and mid mount TEM positions. Given its combination of speed and sensitivity, its key applications are materials science, where it is used for both research imaging and diffraction via SAD and CBED. When the NanoSprint 500 is mounted in the 35 mm port, it becomes a wide-angle viewing system that not only runs independently but it also can complement a slow, high definition camera and/or below column spectrometers.

Perfect for Multi-user facilities

Materials Science

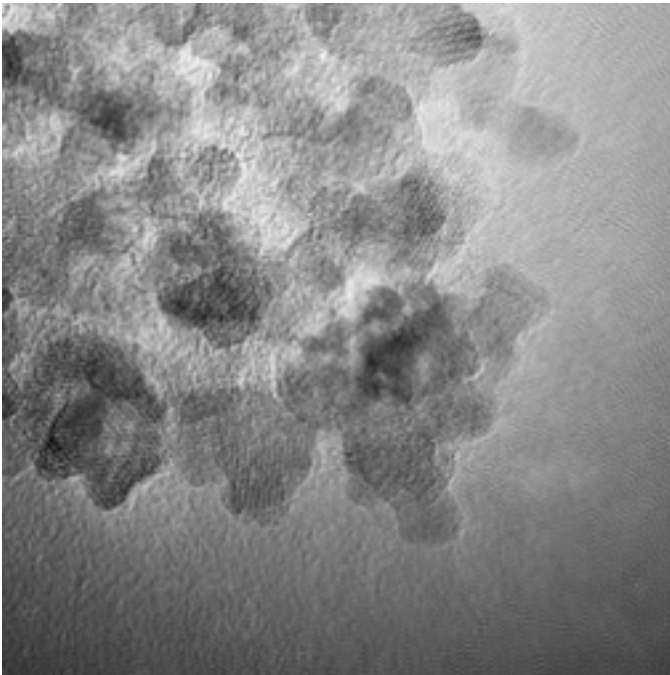

Biological Research

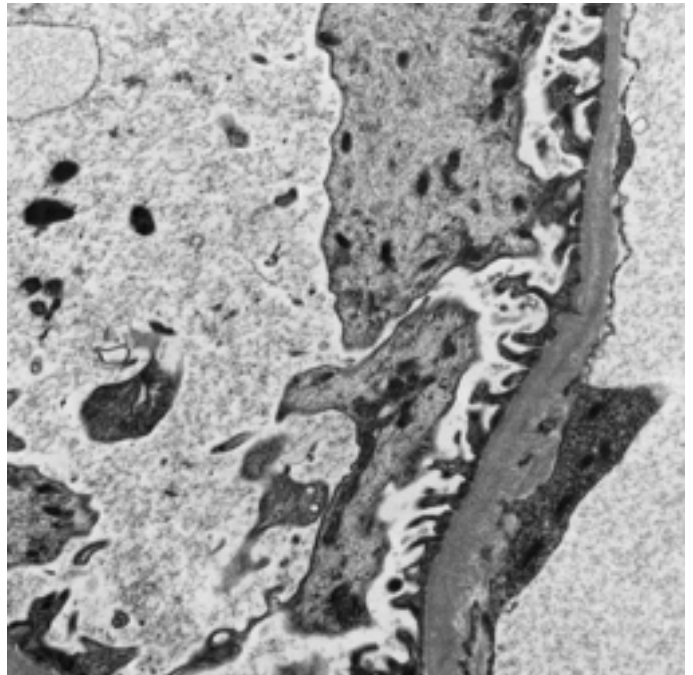

Advanced Microscopy Techniques 242 West Cummings Park, Woburn, MA 01801

Tel: (978)774-5550 Fax: (978)739-4313

Email: info@amtimaging.com URL: <http://www.amtimaging.com>



NanoSprint Rev 4

Selection/Satisfaction/Service = The AMT Advantage


Sensor and Camera Head:

- 1) 2464 x 2048 x 3.4 μ m pixels
- 2) Maximum readout rate 40 fps at full field and full resolution.
- 3) 2.3 electrons per pixel readout noise at full speed with negligible pattern noise.
- 4) 4500:1 inherent dynamic range without frame integration with 12 bit readout.
- 5) 16 bit dynamic range with frame integration.
- 6) Electronic shutter with no beam blanking or mechanical shutter required.
- 7) High speed USB3.0 digital interface.

AMT's A-Lens combines extraordinary speed with high resolution. This lens combines high MTF and high numerical aperture (NA) to provide both unmatched sharpness and extremely high sensitivity. This lens also has negligible distortion across the entire field and maintains focus at all corners.

A- Lens:

- 1) Finite-conjugate, color corrected AMT A-Lens with 0.30x magnification.
- 2) Lens maintains >50% MTF @ 130 line-pairs/mm
- 3) Numerical aperture of 0.27 @image.
- 4) Distortion <1% across the field.
- 5) All lens components and glass-shielding are melt characterized, are AR coated, and are made with demanding 1/10 to 1/4 wave optical surface flatness.

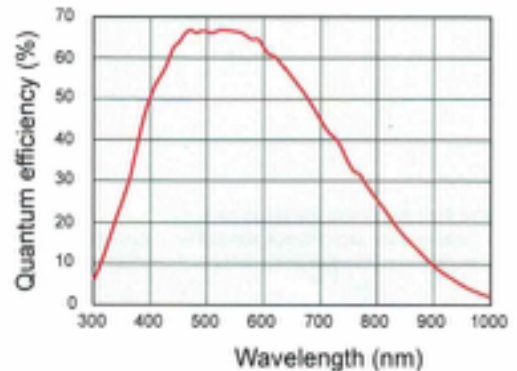

Vacuum and Mechanical:


- 1) All seals are either static or rotating to avoid possibility of catastrophic vacuum failure.
- 2) All electronics are outside the TEM vacuum.
- 3) Proprietary P43 phosphor and substrate for minimum structured background.
- 4) Radiation shielding for 200kV standard with shielding for higher energy system available

System configurations include:

NanoSprint500S-A Classic wide-angle side-mount

NanoSprint500M-A Mid-mount that spans the TEM's magnification range

NanoSprint500L-A Low-mount for high magnification

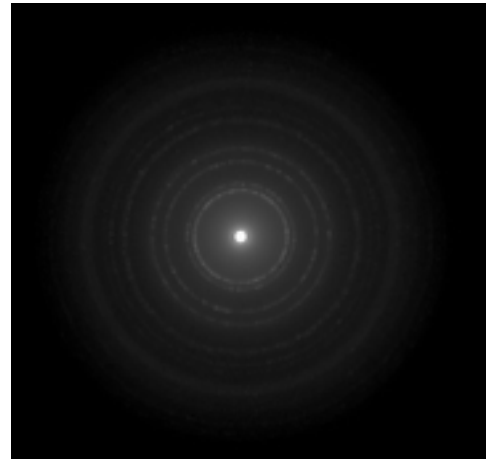

Advanced Microscopy Techniques 242 West Cummings Park, Woburn, MA 01801

Tel: (978)774-5550 Fax: (978)739-4313

Email: info@amtimaging.com URL: <http://www.amtimaging.com>

